


# Honeywell

## UTP CAT5E SOLID CABLE 305 MTRS. FR-PVC AND LSZH

HONEYWELL Cat5e UTP Cable 4 Pairs is suitable for Horizontal Cabling Systems. Used to transmit High Speed Data, Voice and Video signals both digital & analog through entire CHANNEL. With 100 MHz operational bandwidth it well exceeds the requirement of ANSI/TIA 568-C.2 and ISO 11801.

### Features

- 24 AWG Solid Bare Copper
- 305 Mtrs. Box
- Sheath Options : FR-PVC and LSZH.
- Sheath Jacket Colors on Demand.
- "CHANNEL" Performance Warranty.
- Operates at Bandwidth Upto 100 Mhz
- Cable Well Exceeds The Requirements of ANSI/TIA 568-C.2 and ISO 11801

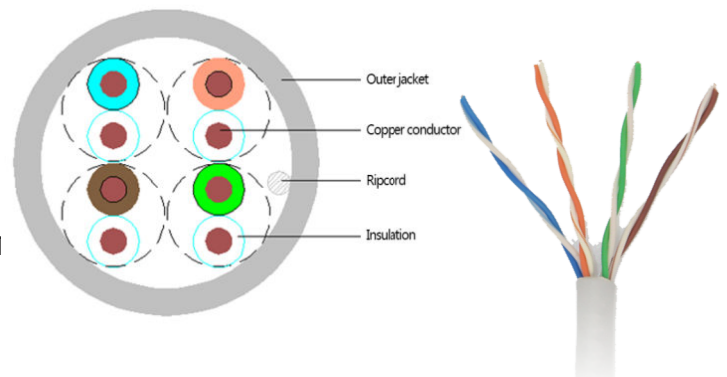

### Technical Specifications

CONSTRUCTION	
Conductor	Solid Bare Electrolytic Grade Copper
Nominal Conductor Diameter	(24 AWG), 0.480±0.015 mm
Insulation	Polyethylene (HDPE)
Pairing	Twisted into Two core
No. of Pair	4 Pair Twisted together
Color Code:	
Pair #1	Orange-White with Orange
Pair #2	Brown-White with Brown
Pair #3	Blue-White with Blue
Pair #4	Green-White with Blue
Outer Sheath	FR-PVC and LSZH
Colour of Sheath (As Per Customer Required)	GREY
Approximate OD	4.80±0.30 mm
RIP CORD	Yes
Sequential Marking	At Every Meter
Temperature Rating	-20 to +60°C
Packing	305 Mtrs. in Box

### Low Frequency Electrical Parameters

- Conductor Resistance (DC): 110 OHMS/1000Mtr@20 Degree C. Max.
- Resistance Unbalance : 5% Max.
- Mutual Capacitance : 5.6 nF/100 Mtrs Max.
- Capacitance To 1khz 50±5 nF/Km(Max.)
- Capacitance Unbalance Pair/Ground : 330PF/100M Max.
- Propagation Delay Skew: 536nS/100M
- Normal Velocity of Propagation: 69%
- Impedance: 100±15%OHMS
- Worst Case Cable Skew : 45nS/100M
- Generally Confirming To EIA/TIA 568-C.2 and IEC/ISO 11801


[www.honeywellconnection.com](http://www.honeywellconnection.com)

The Honeywell trademark is used under license from Honeywell International Inc. Honeywell International Inc. makes no representation or warranties with respect to this product. This product is manufactured by Secure Connection Limited, Hong Kong.

All trade names are registered trademarks of respective manufacturers listed. ©2022 Secure Connection Ltd., Hong Kong. All rights reserved

## ELECTRICAL PERFORMANCE PARAMETERS


Frequency MHz	Insertion Loss (dB/100m)	Next Pair to Pair (dB/100m)	Next Power Sum (dB/100m)	ACRF (dB/100)	Power Sum (dB/100m)	Return Loss (dB/100m)
1	2.2	60	47.0	57.4	54.4	17.0
4	4.5	53.5	50.5	45.4	42.4	17.0
8	6.3	48.6	45.6	39.3	36.3	17.0
10	7.1	47.0	44.0	37.4	34.4	17.0
16	9.1	43.6	40.6	33.3	30.3	17.0
20	10.2	42.0	39.0	31.4	28.4	17.0
25	11.4	40.3	37.3	29.4	26.4	16.0
31.25	12.9	38.7	35.7	27.5	24.5	15.1
62.5	18.6	33.6	30.6	21.5	18.5	12.1
100	24.0	30.1	27.1	17.4	14.4	10.0



COPPER



CAT5e



UTP



## Ordering Information (Part Codes and Description)

No.	Part Code	Description
1	HC000101/CPR/C5E/UTP/FR/305M	Cat 5e UTP 4 Pair Solid Cable 24 AWG FR-PVC 305 Mtrs.
2	HC000102/CPR/C5E/UTP/LS/305M	Cat 5e UTP 4 Pair Solid Cable 24 AWG LSZH 305 Mtrs.

[www.honeywellconnection.com](http://www.honeywellconnection.com)

The Honeywell trademark is used under license from Honeywell International Inc. Honeywell International Inc. makes no representation or warranties with respect to this product. This product is manufactured by Secure Connection Limited, Hong Kong.

All trade names are registered trademarks of respective manufacturers listed. ©2022 Secure Connection Ltd., Hong Kong. All rights reserved