

Honeywell

UTP CAT6 RJ45 MODULAR PLUG



HONEYWELL Cat 6 RJ 45 Modular Jacks well exceeds the performance requirements of Cat 6 and suitable for stranded as well as solid cable terminations.

Features

- Modular Plug With 8P8C
- 24 to 26 AWG Stranded Wires Support
- Meet Wiring Scheme T568A/T568B
- 3 Prong Design With Round Gold Plating
- 750 Mating Cycles
- Pack of 100 Plugs

Technical Specifications


1. Environmental:
Compliant with RoHS and Reach
2. Electrical:
 - 1) 250V AC Max., at 2A
 - 2) Dielectric Withstanding 1000V DC/Min., <0.5A
 - 3) Insulation Resistance: > 500M Ω , 1000V DC/Min.
 - 4) Contact Resistance: <20 M Ω
- 3) Mechanical:
 - 1) Cable to Plug Tensile Strength: 20lbs(89N) Min.
 - 2) Durability: Above 750 Mating Cycles
4. Temperature for Operation:
-40°C to +125°C
5. Material:
Housing Material: Polycarbonate UL94V-0 or 94V-2.
Color: Transparent or Colorful
Gold Plating Thickness: Gold Flash 50U"

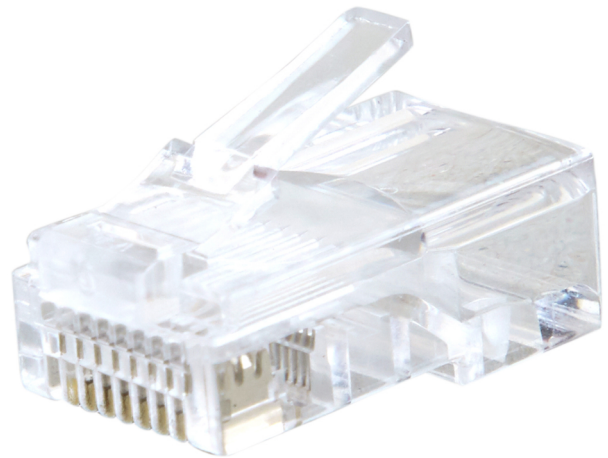

COPPER



CAT6



UTP



Ordering Information (Part Codes and Description)

No.	Part Code	Description
1	HC000291/CPR/C6/UTP/RJ45/100	CAT6 RJ45 Modular Plug

www.honeywellconnection.com

The Honeywell trademark is used under license from Honeywell International Inc. Honeywell International Inc. makes no representation or warranties with respect to this product. This product is manufactured by Secure Connection Limited, Hong Kong.

All trade names are registered trademarks of respective manufacturers listed. ©2022 Secure Connection Ltd., Hong Kong. All rights reserved